

Low Frequency Velocity/Displacement Sensor TM079VD

The TM079VD is specially designed to measure low frequency vibration. The TM079VD output is in velocity or displacement.

Features

- ✓ Measures frequency down to 30 rpm's in velocity
- ✓ IEPE power used with most accelerometer receivers
- ✓ Stainless steel hermetically sealed case
- ✓ Ideal for low speed machines (hydro turbines, cooling towers, fin-fans and wind-turbines)
- ✓ Large signal output, high signal/noise ratio

Specifications

Electrical

Sensitivity:

Velocity:

40 mV/mm/s (1000mV/in/sec), pk, @ 25°C, ±10%

Maximum Amplitude:

Velocity: 100 mm/s pk

Frequency Response: 0.5 - 20 Hz (±3dB)

Isolation: Fully isolated



Power Requirement:	3 - 10mA constant current 18 - 30VDC
Output Impedance:	50Ω
Output Bias Voltage:	10 - 14VDC
Maximum Transmission Distance:	300 meters (1,000 feet)

Environmental and Physicals

Temperature Range:	-20°C to +70°C
Environmental Protection:	IP67
Weight:	1,400 grams
Case Material:	304 stainless steel
Mounting:	3/4 NPT or M20
Mounting Torque:	29N x M

Connection

- A: Power (red)
- B: COM (white)

Order Information

TM079VD-V-AX-BX

Vertical mounting low frequency sensor

TM079VD-H-AX-BX

Horizontal mounting low frequency sensor

AX: Sensitivity


A0: Velocity: 40 mV/mm/s (1000mV/in/sec), pk

A1: Displacement: 4.0mV/μm (100mV/mil), pk-pk

BX: Mounting Stud

B0: 3/4" NPT

B1: M20×1.5

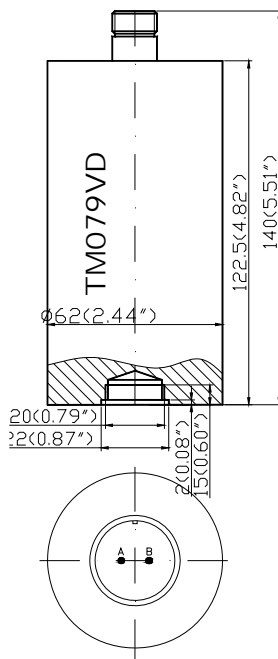

Accessories

TM0716: Mounting screw M20×1.5

TM0717: Mounting screw 3/4" NPT

(Standard cable length is 5 meters. XX = 05)



TM0702-XX: Aluminum MIL connector with XX meters cable, 6.35mm diameter. Operating temperature range goes up to 120°C (250°F)



TM0703-XX: Seal tight boot connector with XX meters cable, 6.35mm diameter. Operating temperature range goes up to 120°C (250°F)



TM0704-XX: Stainless steel MIL connector with armored XX meters cable, 4.83mm diameter. Operating temperature range goes up to 150°C (300°F), Maximum Length is 10 meters.

TM0704-XX-F: Stainless steel MIL connector with Armor with FEP jacket XX meters cable.



TM0705-XX: Cornered MIL connector with armored XX meters cable, 4.83mm diameter. Operating temperature range goes up to 120°C (250°F), Maximum Length is 10 meters.

TM0705-XX-F: Cornered MIL connector with Armor with FEP jacket XX meters cable.